

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number
WO 03/055775 A1(51) International Patent Classification⁷: **B65H 35/00**

(21) International Application Number: PCT/GB02/04716

(22) International Filing Date: 17 October 2002 (17.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0200144.4	4 January 2002 (04.01.2002)	GB
0206231.3	18 March 2002 (18.03.2002)	GB

(71) Applicant and

(72) Inventor: **PANTON, Mark** [GB/GB]; 159 Carholme Road, Lincoln, Lincolnshire LN1 1RU (GB).(74) Agent: **LOVEN, Keith, James**; Loven and Co., Quantum House, 30 Tentercroft Street, Lincoln LN5 7DB (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DEVICE FOR CONTROLLING THE DISPENSING OF TAPE FROM A ROLL

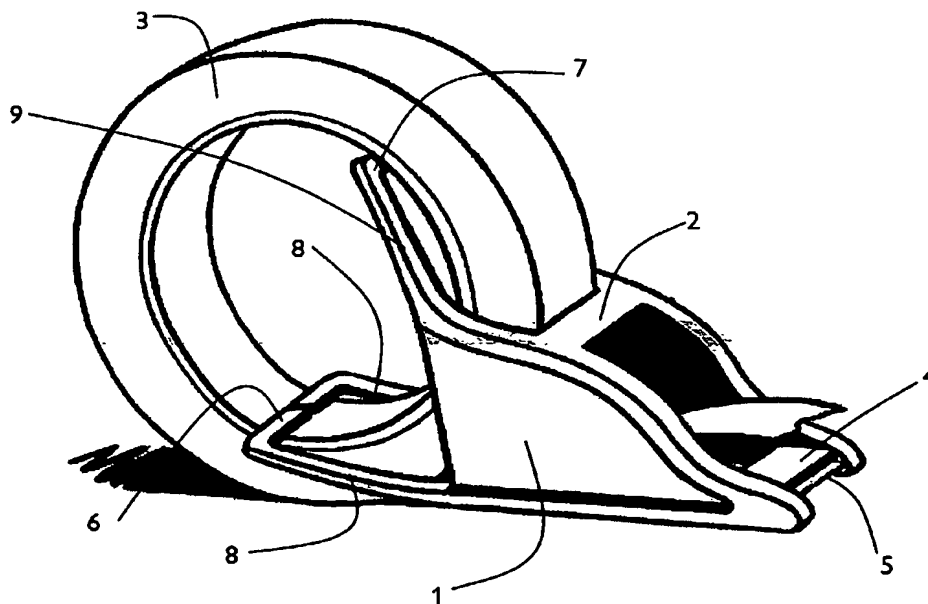

(57) Abstract: A device for controlling the dispensing of tape from a roll comprises a body portion (1) having a first support (2) which rests, in use, on the outer surface of the roll (3), the body portion carrying a cutter bar (4) against which the tape may be drawn to cut the tape, and second and third supports (6 and 7) within the roll, the second and third supports being carried by respective arms (8 and 9) extending from the body portion. At least one of the arms is pivotable or flexible relative to the body portion and is biased outwardly away from the other support to ensure that the second and third supports are held in contact with the internal surface of the roll as the external diameter of the roll decreases in use.

A DEVICE FOR CONTROLLING THE DISPENSING OF TAPE FROM A ROLL

Field of the Invention

This invention relates to a device for controlling the dispensing of tape from a roll. The device allows improved delivery of sections of adhesive tape from a roll of such tape, for example.

Background of the Invention

Adhesive tape is a simple form of semi-permanent fixing. Generally, adhesive tape is supplied to the user in the form of a roll made from a continuous strip of tape. The user can therefore peel off the desired length of tape, cut it, and then apply it to whatever material the user wishes.

Although the use of adhesive tape is a relatively simple exercise, sometimes the user can become frustrated by the constant need to find the free end of the adhesive tape each time a section of tape is removed from the roll. This minor chore can become a major task for users with impairments such as poor eyesight or arthritis.

At present, this common flaw of adhesive tape technology is dealt with by the use of adhesive tape dispensers. These dispensers come in a wide range of forms, but they have a common operation mechanism, which involves holding the adhesive tape roll in a housing so that the tape can be unwound to a desired length before a section of tape is removed from the body using a cutting element, which is also attached to the housing.

Adhesive tape dispensers are an effective method of providing sections of tape from a roll of adhesive tape. However, adhesive tape rolls come in many different sizes and as a result, there are a wide range of tape dispensers to accommodate them. Users can find themselves forced to buy different tape dispensers to use with different size tape roll, which can lead to unnecessary expense.

Summary of the Invention

The invention provides a device for controlling the dispensing of tape from a roll, comprising a body portion having a first support which rests, in use, on the outer surface of the roll, the body portion carrying a cutter bar against which the tape may be drawn to cut the tape, and second and third supports within the roll, the second and third supports being carried by respective arms extending from the body portion, at least one of the

- 2 -

arms being pivotable or flexible relative thereto and being biased outwardly away from the other support to ensure that the second and third supports are held in contact with the internal surface of the roll as the external diameter of the roll decreases in use.

Preferably, the arms are in the form of generally rectangular frame members extending from the body portion, the side of each frame remote from the body portion being split into two parts and the other opposed side members of each frame being resiliently deflectable to permit introduction of the roll through the opened-out splits, the sides of the frames with the openings constituting the second and third supports.

The body portion, the supports and the arms are suitably integrally formed from a resilient plastics material, the biasing of the arms resulting from resilient deformation thereof.

The body portion may be provided with an opening between the first support and the cutter bar through which, in use, the tape from the roll can be led. The edge of the opening which faces away from the roll preferably makes an oblique angle with the axis of rotation of the roll, whereby the cut end of the tape is deflected, when at rest, out of alignment with the remainder of the tape on the roll.

The cutter bar is preferably positioned so as to make an oblique angle with the axis of rotation of the roll, to assist in cutting the tape progressively. The cutter bar preferably includes a toothed metal insert.

The second and third supports preferably both contact the roll on the same side of the axis of rotation of the roll as the first support.

The device of the invention provides a simple and convenient way to control the dispensing of tape from a roll, especially self-adhesive tape. It can be made small and light enough to be carried on the roll, and can be adapted to fit on to a range of different sizes of roll.

Brief Description of the Preferred Embodiments

In the drawings, which illustrate exemplary embodiments of the invention:

Figure 1 is a perspective view of a tape control device mounted on a roll of self-adhesive tape;

- 3 -

Figure 2 is a side elevation illustrating one mode of use of the device shown in Figure 1;

Figures 3 and 4 are views showing the fitting of the device on to the roll of tape;

Figure 5 is a side elevation illustrating the use of the device to cut the tape when the desired length has been dispensed;

Figure 6 is a front elevation of an alternative embodiment of the device; and

Figure 7 is a sectional elevation of the device shown in Figure 6.

Detailed Description of the Drawings

Referring first to Figures 1 and 2, the device suitably consists of a unitary plastics moulding in a resilient plastics material such as polyethylene. A body portion 1 has a transverse support bar 2 which engages the outer surface of a tape roll 3, in use. The body portion 1 also mounts a cutter bar 4 carrying a serrated metal blade 5 against which the tape may be cut. It will be appreciated that, as an alternative, the outer bar 4 could be formed to provide a cutting or tearing edge, which could be serrated or continuous, without the need for the blade 5, depending on the nature of the tape to be cut. Also, the blade, when provided, could be formed without serrations.

The body portion 1 is also provided with second and third supports 6 and 7 which bear against the internal surface of the roll 3, each being constituted by a pair of opposed tabs carried by a respective resilient arm 8 or 9 extending from the body portion 1 on either side of the roll 3, in use. The tabs and arms 6 and 8, 7 and 9 this constitute, with the body portion 1, a generally rectangular frame with the side remote from the body portion being split.

The legs 8 and 9 are formed so as to be resiliently bendable so that the legs 8 of one pair can be bent towards the legs 9 of the other pair, so that when they are released they urge the second and third supports 6 and 7 into engagement with the internal surface of the roll, thereby holding between the support bar 2 on the external surface of the roll and the second and third supports 6 and 7 on the internal surface. This permits rotation of the roll 3 relative to the device, but without the need for an axle and associated mounting to permit rotation. In practice, when dispensing tape, as shown in Figure 2, the user will grasp the roll 3 and allow the device to rotate around the roll as the tape is

- 4 -

pulled from the roll. The tape can then be pulled upwards into contact with the cutter bar 4 to separate a cut strip of tape from the roll. It will be seen that, in the case of self-adhesive tape, which is normally wound on to the roll with the adhesive side inwards of the roll, the non-adhesive side contacts the cutter bar. In addition to facilitating placing of the tape, as hereinafter described, this has the additional benefit of reducing contamination of the serrated teeth of the blade, where used, with adhesive, prolonging its effectiveness.

The resilience of the legs 8 and 9 also permits the opposed tabs forming the second and third supports to be separated, to permit installation of the device on to the roll, as now described with reference to Figures 3 and 4. The roll 3 is held in one hand while the third support 7 and associated legs 9 are fitted over the roll from one side (Figure 3). The device is then twisted round so as to align it with the roll.

The second support 6 is then positioned within the roll by separating the legs 8 to feed the two halves of the support 6 into the roll engaging the inner surface thereof (Figure 4). The free end of the tape is then fed through the space between the first support bar 2 and the cutter bar 4.

Figure 5 illustrates the use of the device when applying tape to a surface, for example adhesive tape in packaging use. The tape is applied to the surface 10 and is unrolled to the desired length by holding on to the roll in conventional manner. When it is desired by the user to cut the tape, the device is grasped by the user, and the nose 11 of the device adjacent to the cutter bar is held against the surface 10 at the position where the tape is to be cut. Rotating the device as shown in Figure 5 brings the tape into contact with the serrated blade, causing it to be severed. The blade is suitably set at an oblique angle so that the tape is cut progressively, rendering the cutting action easier. The upper surface of the first support 2 is suitably set at an oblique angle to the axis of rotation of the roll so as to displace the cut end of the tape sideways out of alignment with the roll by a small amount. This ensures that the free end of the tape may be readily detached from the roll when required for use.

Figures 6 and 7 illustrate an alternative embodiment of the device having two principal enhancements over the embodiment shown in Figures 1 to 5. Firstly, a stopper

- 5 -

bar 12 is positioned across the body portion adjacent to the cutter bar 4, but with an opening for tape to pass between the stopper bar 12 and the first support 2. This serves not only to protect the user's thumb from contact with the blade 5 when first grasping the cut end of the tape to feed it through the device, but also to prevent accidental cutting
5 of the tape, for example when using the device to assist in wrapping small packages.

Secondly, the body portion 1 is provided with a pair of notches 13 to permit the device to be located more readily on an edge of an object to which tape is to be applied, for example a parcel, so that the free end of the tape may first be attached to the side of the object. The tape roll can then be pulled to roll out the tape over the upper surface of
10 the object.

CLAIMS



1. A device for controlling the dispensing of tape from a roll, comprising a body portion having a first support which rests, in use, on the outer surface of the roll, the body portion carrying a cutter bar against which the tape may be drawn to cut the tape, and second and third supports within the roll, the second and third supports being carried by respective arms extending from the body portion, at least one of the arms being pivotable or flexible relative thereto and being biased outwardly away from the other support to ensure that the second and third supports are held in contact with the internal surface of the roll as the external diameter of the roll decreases in use.
2. A device according to Claim 1, wherein the arms are in the form of generally rectangular frame members extending from the body portion, the side of each frame remote from the body portion being split into two parts and the other opposed side members of each frame being resiliently deflectable to permit introduction of the roll through the opened-out splits, the sides of the frames with the openings constituting the second and third supports.
3. A device according to Claim 1 or 2, wherein the body portion, the supports and the arms are integrally formed from a resilient plastics material, the biasing of the arms resulting from resilient deformation thereof.
4. A device according to Claim 1, 2 or 3, wherein the body portion has an opening between the first support and the cutter bar through which, in use, the tape from the roll can be led.
5. A device according to Claim 4, wherein the edge of the opening which faces away from the roll makes an oblique angle with the axis of rotation of the roll, whereby the cut end of the tape is deflected, when at rest, out of alignment with the remainder of the tape on the roll.
6. A device according to any preceding claim, wherein the cutter bar is positioned so as to make an oblique angle with the axis of rotation of the roll.
7. A device according to any preceding claim, wherein the cutter bar is a toothed metal insert.

- 7 -

8. A device according to any preceding claim, wherein the second and third supports both contact the roll on the same side of the axis of rotation of the roll as the first support.

1/4

Fig 1

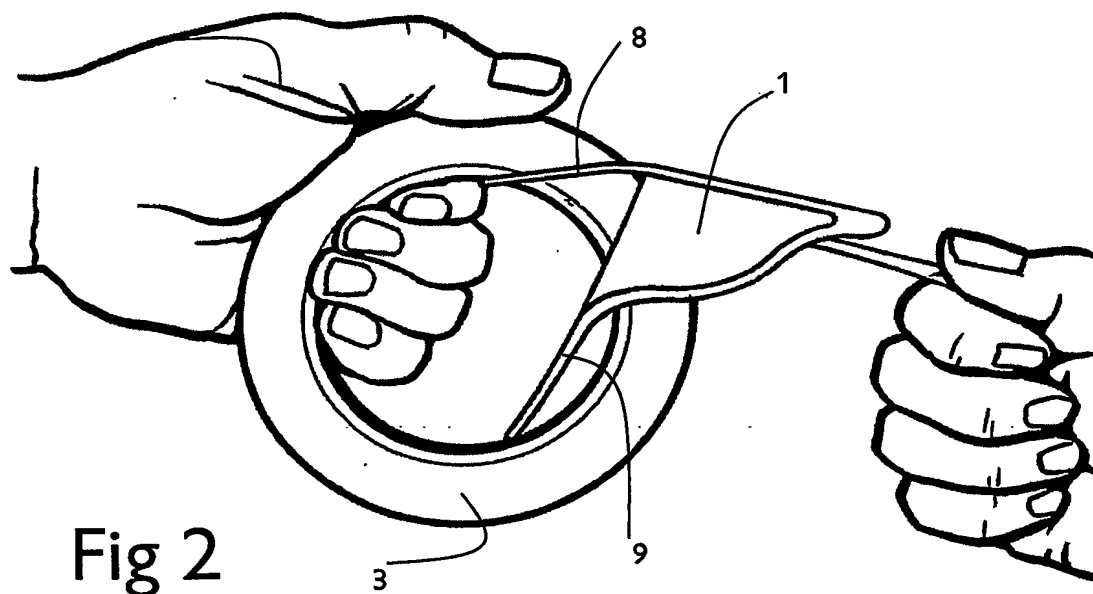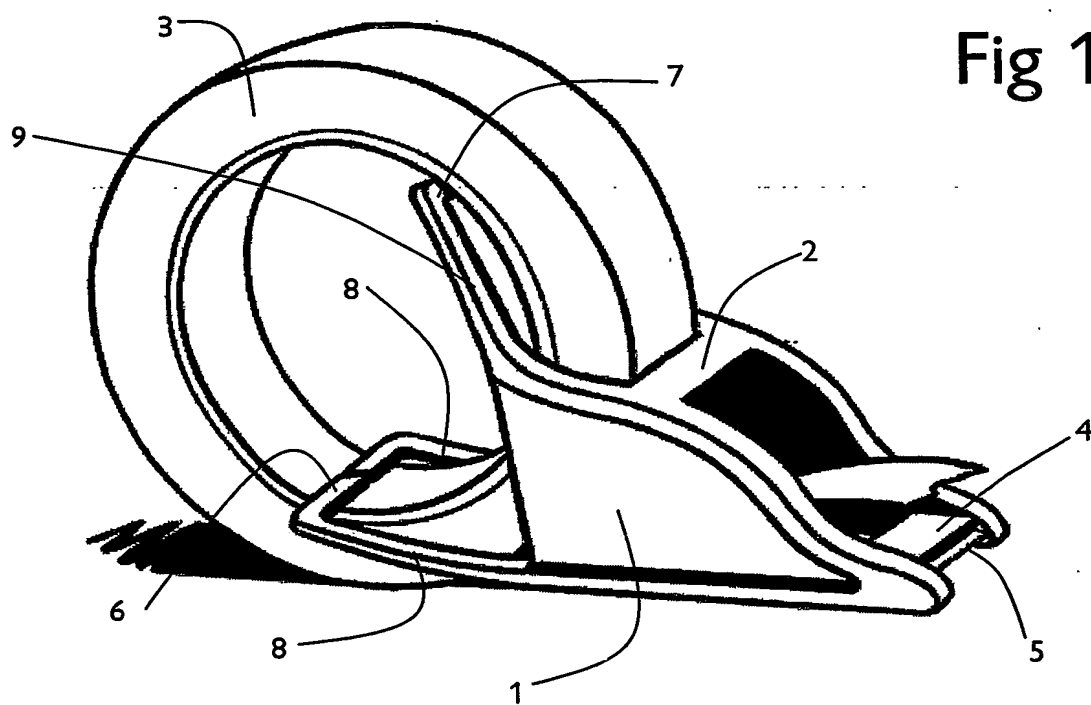

2/4

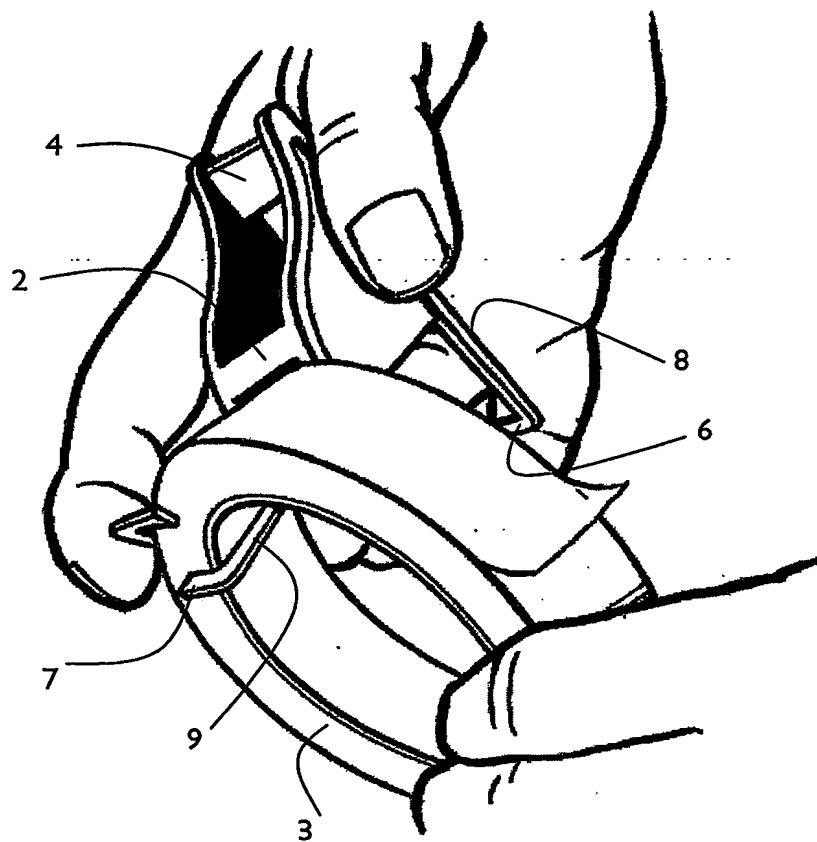


Fig 3




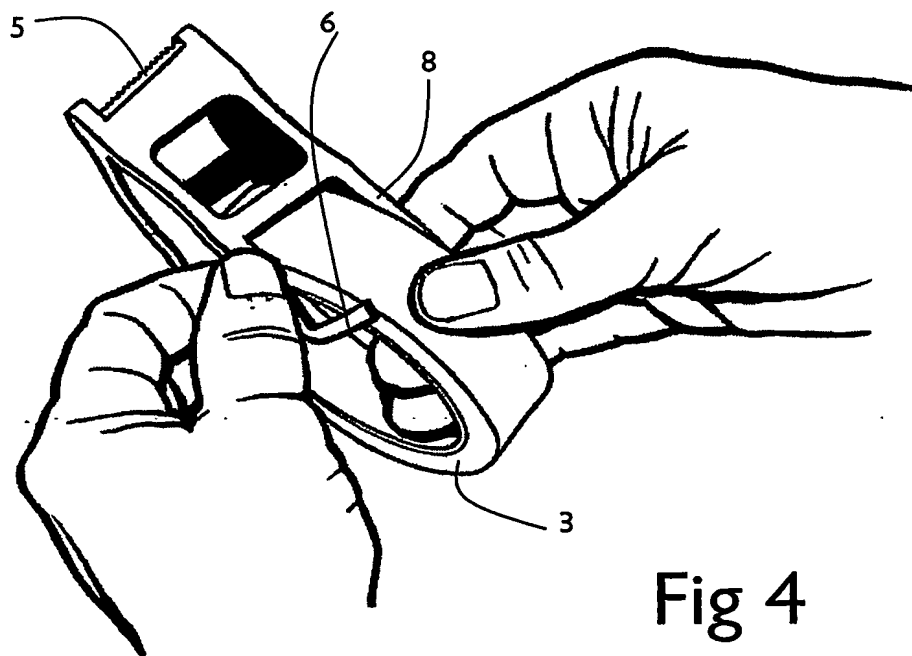


Fig 4

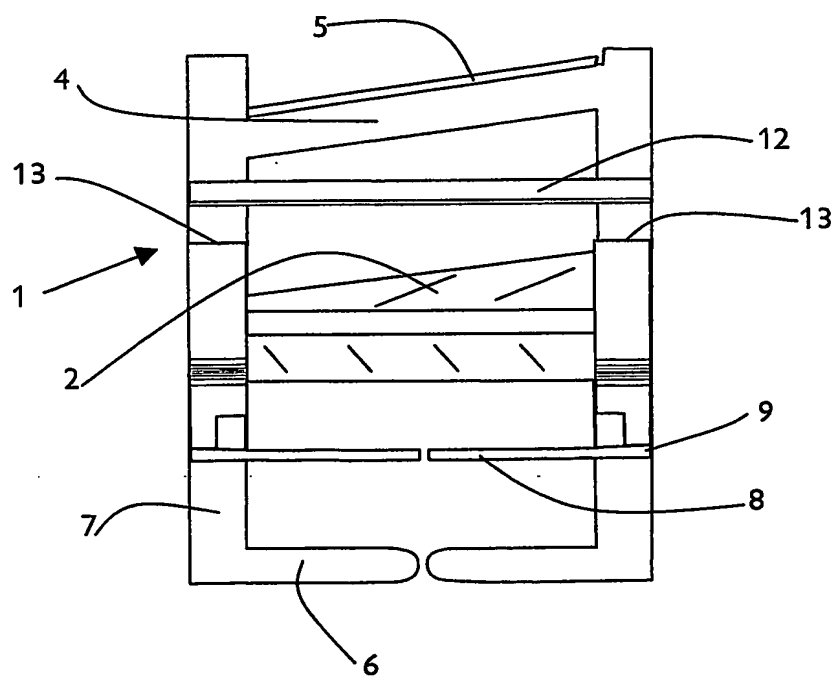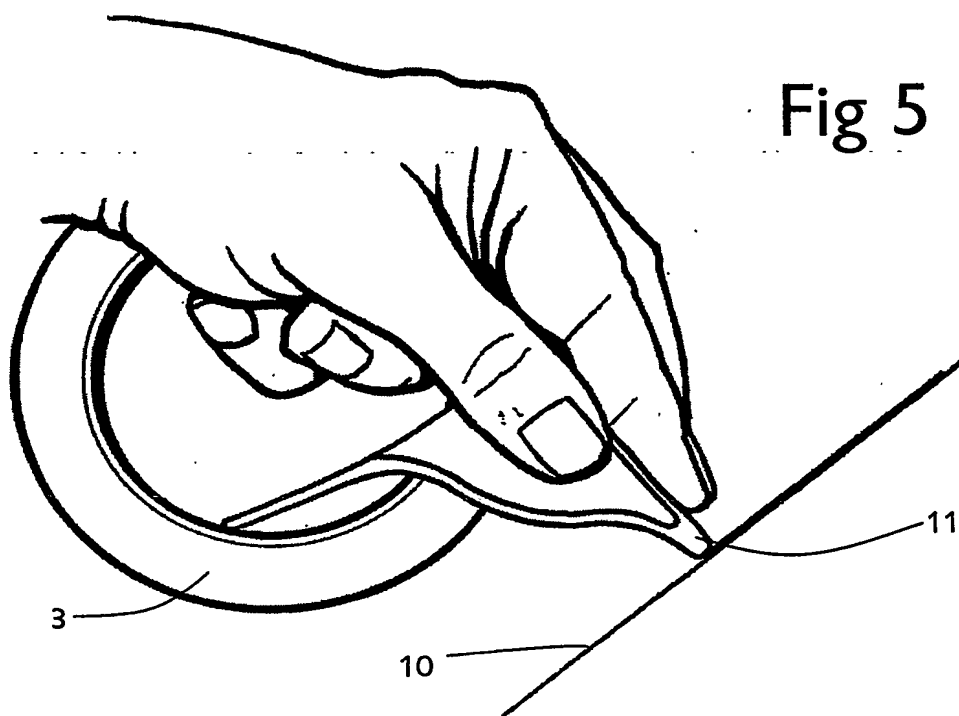

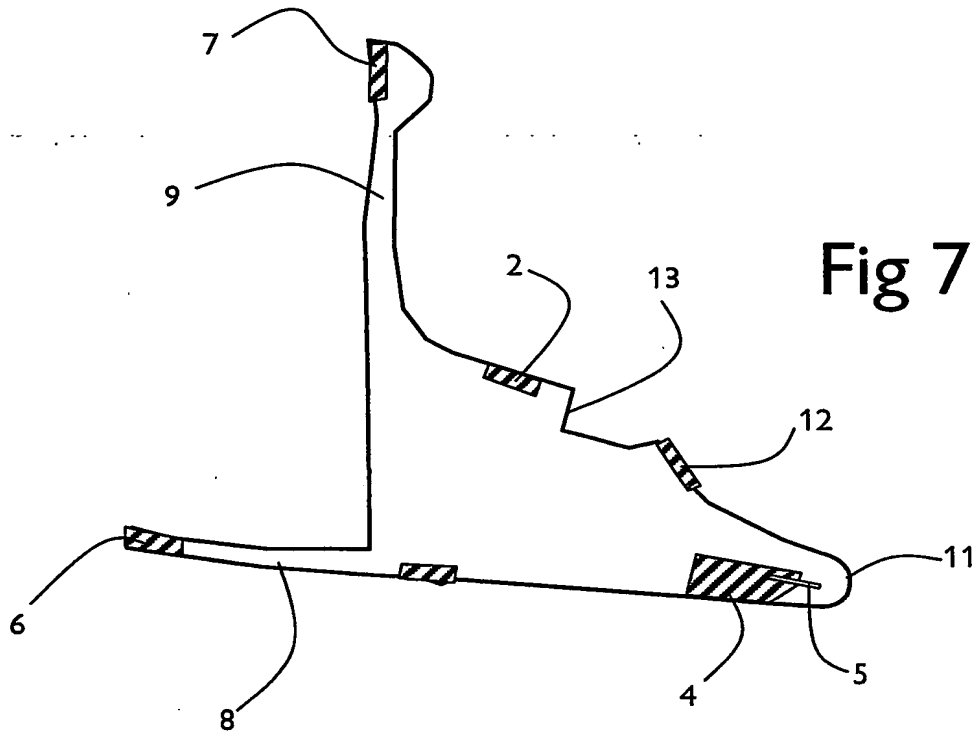

INTERNATIONAL SEARCH REPORT

 Int. Application No
 PCT/GB 02/04716

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B65H35/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 771 834 A (PERMACEL TAPE CORP) 3 April 1957 (1957-04-03)	1, 7, 8
A	the whole document	2, 3
A	GB 1 143 188 A (UNIVERSAL PATENT & DEVELOPMENT LTD) 19 February 1969 (1969-02-19)	1, 3, 4, 7, 8
A	the whole document	
	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 11, 29 November 1996 (1996-11-29) & JP 08 188324 A (TEC MEC:KK), 23 July 1996 (1996-07-23) abstract	1, 3, 7

	--- --	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- * & * document member of the same patent family

Date of the actual completion of the international search

29 April 2003

Date of mailing of the international search report

09/05/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Raven, P

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/GB 02/04716

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 283 977 A (SCHLUCHTER) 8 November 1966 (1966-11-08) the whole document ---	1,7,8
A	US 4 711 384 A (HARRIS) 8 December 1987 (1987-12-08) column 3, line 15 - line 26; figure 1 -----	2,3

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int'l Application No

PC 1/GB 02/04716

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 771834	A	03-04-1957	NONE	
GB 1143188	A	19-02-1969	NONE	
JP 08188324	A	23-07-1996	NONE	
US 3283977	A	08-11-1966	GB 1098512 A	10-01-1968
US 4711384	A	08-12-1987	AU 4777985 A	18-06-1986
			CA 1249797 A1	07-02-1989
			EP 0202236 A1	26-11-1986
			MX 161934 A	08-03-1991
			WO 8603182 A1	05-06-1986